
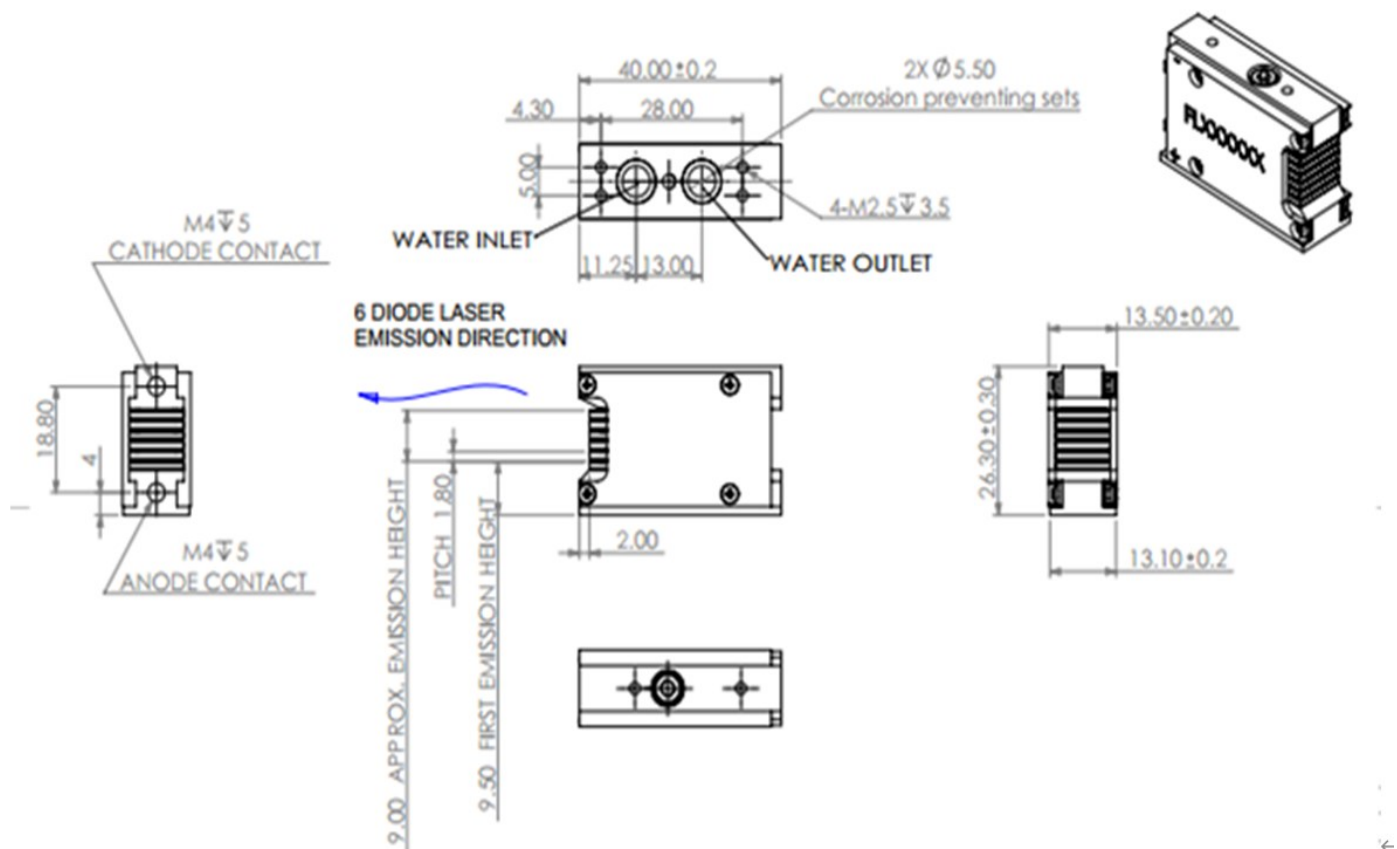


Micro-Channel Water Cooled Vertical Stack Diode Laser HVS61

	<p>Features</p> <ul style="list-style-type: none"> • AuSn bonding • High power • Long life 	<p>Applications</p> <ul style="list-style-type: none"> • Hair removal
---	--	---

Product Dimensions (mm)



Remark: The structure drawing is for reference only. Please feel free to contact us for any special requirements.

Product Specifications

Product Code

HAR000032

Part No. ¹

FL-HVS61-6×1-600-1060

Optical Data ²	Unit	Value
Centroid Wavelength	nm	1064
Wavelength Tolerance	nm	± 20
Output Power per bar ³	W	100
Numbers of bar	#	6
Max. Duty Cycle	%	40
Max. Pulse Width	ms	400
Fast Axis Divergence (FWHM)	degree	35
Slow Axis Divergence (FWHM)	degree	8
Polarization Mode	-	TE
Wavelength Temp. Coefficient	nm/°C	~ 0.28

Electrical Data ²

Operation Current	A	≤ 110
Threshold Current	A	≤ 25
Operating Voltage	V	≤ 2
Slope Efficiency	W/A	≥ 1.1
Power Conversion Efficiency	%	≥ 50

Miscellaneous Data ²

Operating Temperature ⁴	°C	20 ~ 30
Coolant	-	Deionized water
Flow Rate per bar	L/min	0.2 ~ 0.4
Max Inlet Pressure	kPa	380
Conductivity	μs/cm	≤ 5

¹Part No. = Brand Code - Series - Num. of bars- Power - Centroid Wavelength.

²Data at 25°C unless otherwise stated.

³Reduced lifetime if used above nominal operating conditions.

⁴A non-condensing environment is required for storage and operation below ambient dew level.

