

Wide Angle Diffusers

160° Glass Diffuser



Features and Advantages

High quality homogenizers for spanning a defined angle from collimated light. A top hat or cos⁻² profile with steep slopes and high homogeneity can be created along one dimension in angular space. Combining two diffusers creates a homogeneous rectangular distribution. Especially designed for high laser input powers, using low absorption glass or fused silica for optimized LIDT.


The new diffusers provide line or rectangular shape, steep slopes, high optical efficiency, wide angles, repeatability, no zero order, no hot spots, no degradation under UV.


Product Specifications

Product Code		ZLA003632 ⁽¹⁾⁽³⁾
Specification Data	Unit	
Design Angle (FWHM)	0	160
Design Angle (FW/e²)	0	170
Angular Output Profile ⁽²⁾		Cos ⁻²
Spatial Output Profile(2)		Gaussian-like
Material		High-Index IR
Length (L)	mm	5.0 ± 0.1
Width (W)	mm	5.0 ± 0.1
Thickness (T)	mm	0.5 ± 0.05
Clear Aperture (Al x Aw)	mm²	4.5 x 4.5
Refractive Index		1.91
Design Wavelength	nm	940
AR Coating ⁽⁴⁾	nm	Uncoated
Transmission	%	70 ⁽⁵⁾

 $^{^{\}mbox{\scriptsize (1)}}$ Example for customization — design, dimensions and coating on request

Product Drawing (mm)





1


 $^{^{(2)}}$ M 2 > 10 and minimum beam size >2.5mm FW/e 2 advised to ensure steep slopes and high homogeneity

 $^{^{(3)}}$ Optimization design based on DPSSL@1064nm


⁽⁴⁾ Customization for coating design is available

⁽⁵⁾ Transmission ≥99% after coating at design wavelength±10nm and angle of incident 0-30°




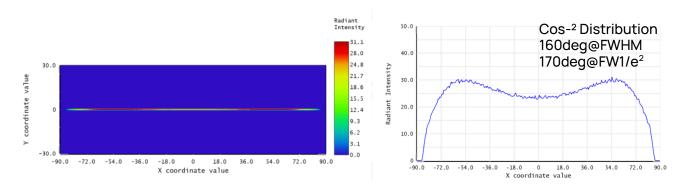

Angular Distribution Pattern (Left) and Angular Output Profile (Right)

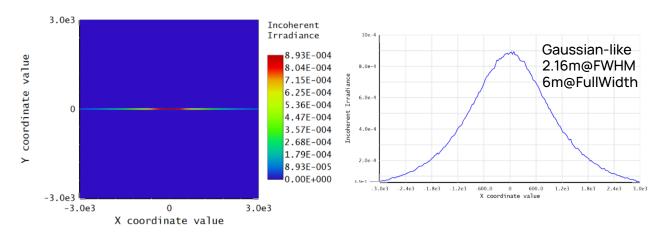

Spatial Distribution Pattern (Left) and Spatial Output Profile (Right), 1 meter away from Diffuser

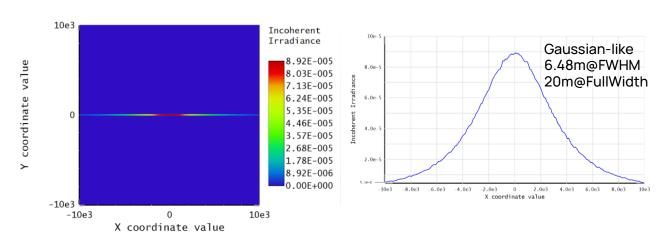

Spatial Distribution Pattern (Left) and Spatial Output Profile (Right), 3 meters away from Diffuser

⁽⁶⁾ Simulation based on DPSSL@1064nm, the original divergences of lasing diodes are FA@0.172deg and SA@1.335deg