


Fiber Coupler for Mini-Bars

Monolithic solution for VIS and IR

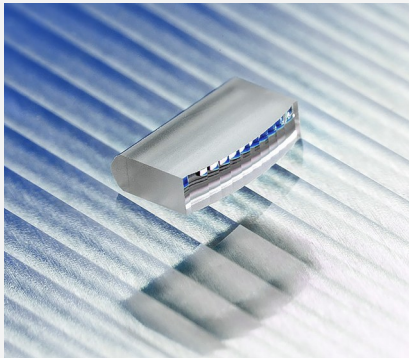

Features and Advantages

Monolithic fiber coupler for the efficient coupling of the light output of mini-bars with 10 emitters into optics fibers with a core diameter of 600 μm or larger and NA of 0.22 or larger.

Product Specifications


Specification Data	Unit	Value
Material		S-TIH53 (Ohara)
Length (L)	mm	6.0 ± 0.1
Width (W)	mm	1.5 ± 0.1
Thickness (T)	mm	3.81 ± 0.05
Clear Aperture	mm^2	5.0×1.2
Numerical Aperture (NA)		FA:0.5; SA:0.08
Transmission	%	> 99
Typical Coupling Efficiencies (for Uncoated Fibers)		
10 Emitters (Width: 90 μm); Fiber Diameter 600 μm , NA 0.22	%	90
10 Emitters (Width: 90 μm); Fiber Diameter 800 μm , NA 0.22	%	92
Surface Imperfections (DIN ISO 10110-7)		5/ 2x0.025; C3x0.1; L1x0.025; E ⁽¹⁾

Product Code	Unit	Value
		MOD000399⁽²⁾
Distance Emitter Facet to Coupler	mm	0.4
Distance Coupler to Fiber	mm	11.8 (@ 970 nm)
AR Coating	nm	790 - 990 nm

⁽¹⁾ Chipping on short edge 0.2, chipping on long edge 0.08.

⁽²⁾ Example for customization—design, dimensions, coatings & bottom tabs on request.

Product Drawing

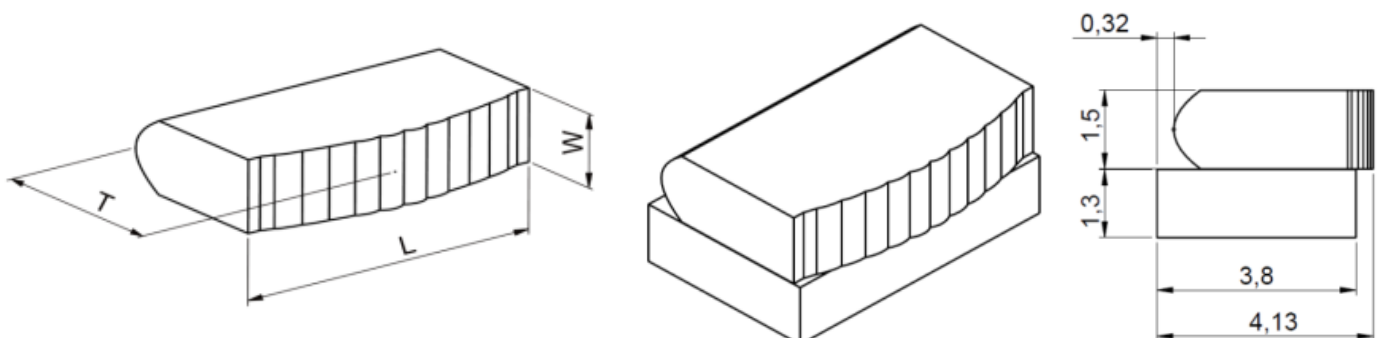

Rev 04 | Updated July 16, 2026 | RoHS compliant 2011/65/EU and 2015/863/EU

1

All rights reserved. Product specifications and descriptions are subject to change. All our products are patent pending. Please contact our sales representatives for complete details.

LIMO GmbH

Focuslight (DG) Microoptics Co. Ltd.

Address: Bookenburgweg 4-8, 44319 Dortmund, Germany

Address: No. 49, Jingyi Road, Dongcheng Street, Dongguan City, Guangdong Province, China

Tel: +49 231 22 24 1 - 0 (DE) +86 29 8956 0050 (CN) | Email: sales@focuslight.com | Website: <https://www.focuslight.com>